


CFR-A5 Pro

CFR-A5 Pro 0 100CN
30 85CN

GB/T 386, ASTM D613, IP 41, EN ISO 5165

- CFR
82.55mm 114.30mm 8:1 36:1 CFR-48
ASTM D613 GB/T 386
90°

- “ ”
6 1 “ ”

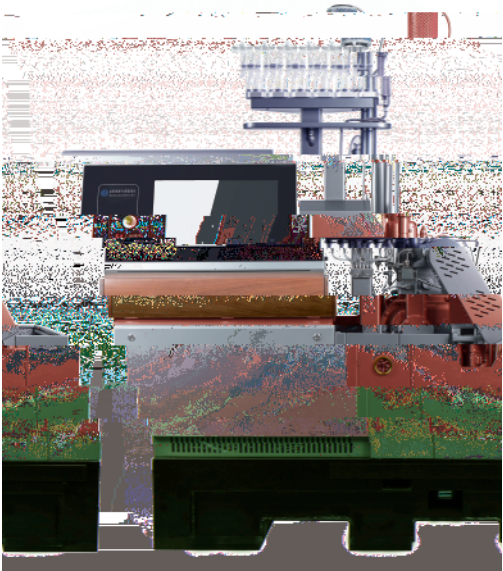

•

•

WIFI

GB/T 386, ASTM D613 IP 41,EN ISO 5165									
0		100		30		85			
		82.55mm		3.250inch					
		114.30mm		4.50inch					
8:1		36:1,							
		611729.10mm³		37.33in³					
100		± 2		212		± 3			
		900rpm		± 9rpm					
		13°		± 0.2°					
		10.30MPa		± 0.34MPa		1500psi		± 50psi	
		13.0mL/min		± 0.2 mL/min					
38		± 3		100		± 5			
		0.20mm		± 0.025mm		0.008in.		± 0.001in.	
66		± 0.5		150		± 1			
100		± 2		212		± 3			
57		± 8		135		± 15			
		172kPa		207kPa		25psi		30psi	

3275kPa ± 138kPa 475psi ± 20psi
-0.25kPa -1.5kPa
635mm ± 25mm 25in. ± 1in.
USB
LIMS WIFI
15KW
15 35 20% 90%RH
AC380V ± 10%,50Hz AC220V ± 10% 50Hz
1700mm × 650mm × 2300mm
1200 KG